





Lasertex Z Series

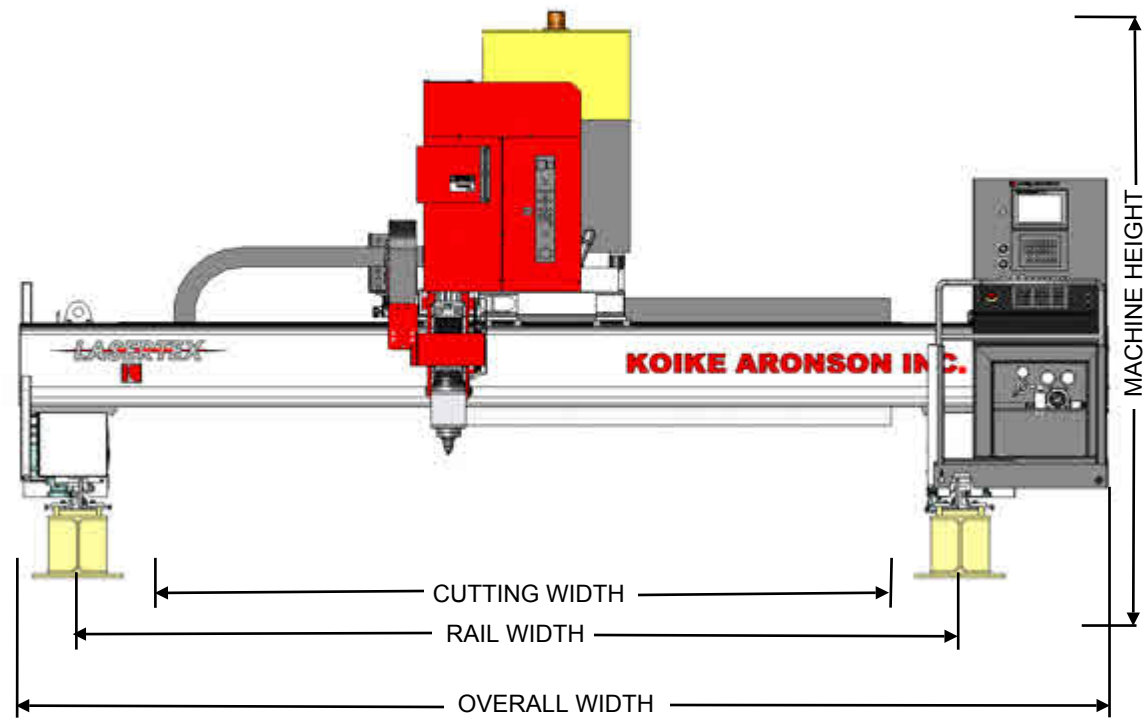

Koike Aronson, Inc. Ransome

Lasertex-Z Series Precision CO₂ Laser Cutting Machine

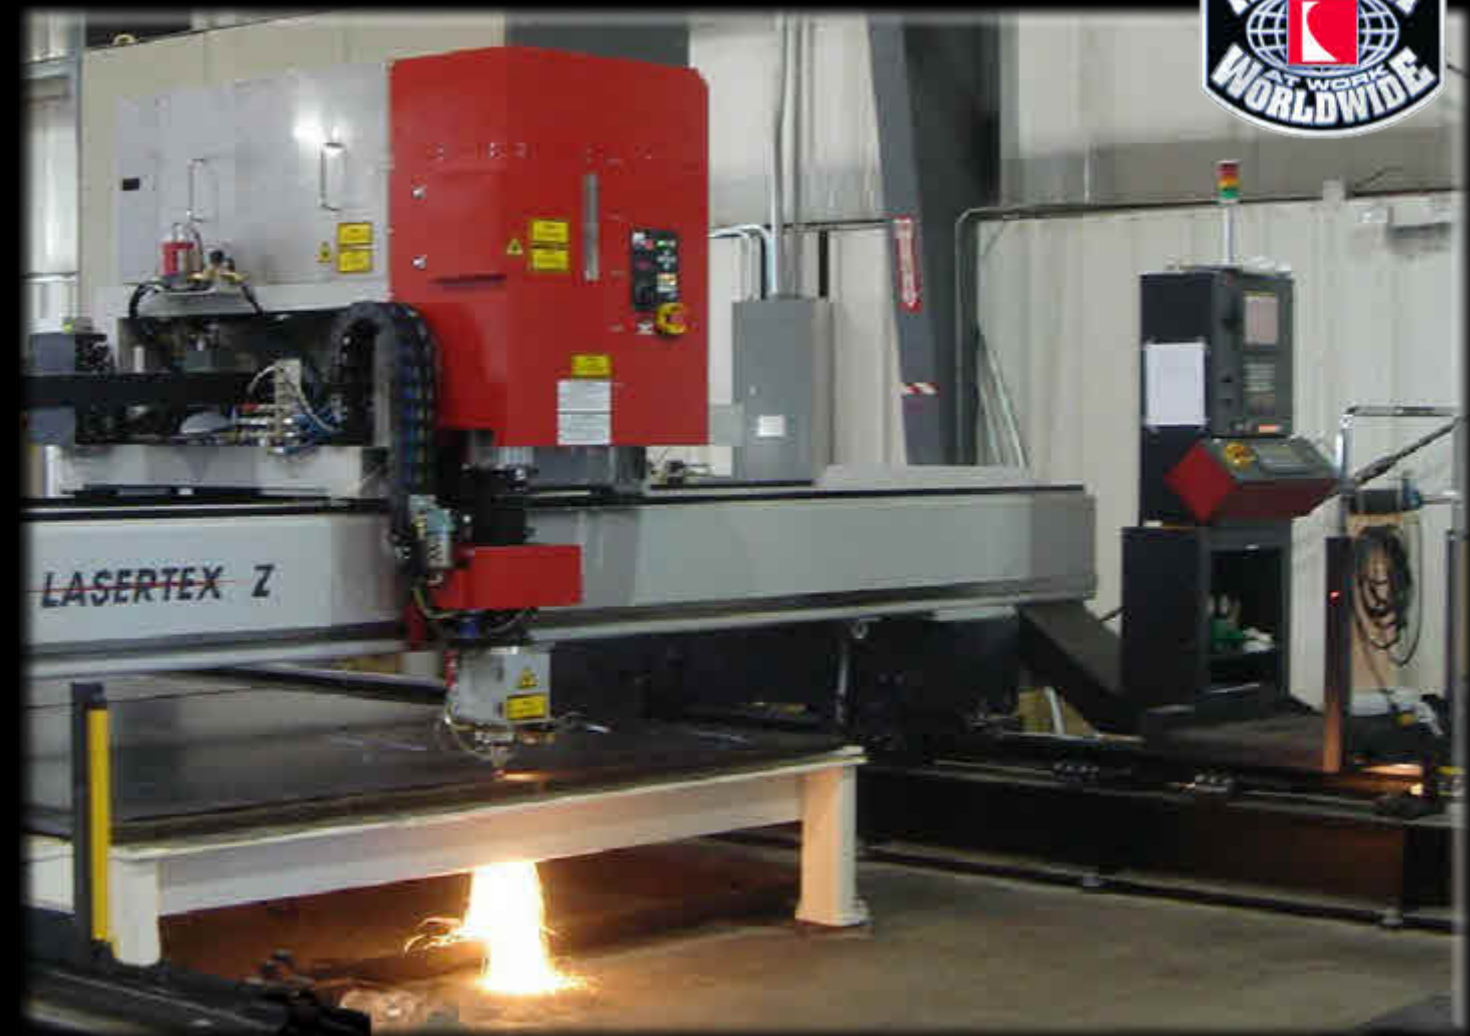

Lasertex Z Series Specifications

| | 6Kw | 4Kw |
|--|----------------------------------|----------------------------------|
| Positioning Accuracy | ±0.1mm/1000mm (±0.004"/39.4") | ±0.1mm/1000mm (±0.004"/39.4") |
| Rapid Traverse Speed | | |
| X axis | 24,000 mm/min (945"/min) | 24,000 mm/min (945"/min) |
| Y axis | 36,000 mm/min (1417"/min) | 24,000 mm/min (945"/min) |
| Z axis (during automatic operation) | 10,000 mm/min (394"/min) | 10,000 mm/min (394"/min) |

Specifications Subject To Change

| LASERTEX SYSTEM DIMENSIONS | | | | | |
|----------------------------|--------------|---------------|---------------|---------------|----------------|
| Model | | Cutting Width | Rail Width | Overall Width | Machine Height |
| LT-3560 | Inches mm | 138 3500 | 177 4500 | 236 6000 | 101 2500 |
| LT-4060 | Inches mm | 157 4000 | 197 5000 | 254 6450 | 101 2500 |
| LT-4560 | Inches mm | 177 4500 | 216.5 5500 | 276 7000 | 101 2500 |
| LT-5060 | Inches mm | 197 5000 | 236 6000 | 295 7500 | 101 2500 |
| Model | | Cutting Width | Rail Width | Overall Width | Machine Height |
| LT-3540 | Inches mm | 138 3500 | 177 4500 | 218 6000 | 101 2500 |
| LT-4040 | Inches mm | 157 4000 | 197 5000 | 238 6450 | 101 2500 |
| LT-4540 | Inches mm | 177 4500 | 216.5 6000 | 258 7000 | 101 2500 |
| LT-5040 | Inches mm | 197 5000 | 236 6000 | 277 7500 | 101 2500 |

Koike Aronson, Inc./Ransome
635 West Main Street
Arcade, N.Y. 14009
Phone: (800) 252-5232
Fax: (585) 457-3517
www.koike.com



Printed in U.S.A.

Koike Aronson/Ransome, Inc. introduces the Lasertex Z series large gantry laser cutting machine. Breakthrough features of the Lasertex has been proven to **reduce maintenance, decrease cycle time, and improve production throughput.**

The Lasertex Z series produces highly accurate parts that can further reduce downstream production costs. The Lasertex series is the ultimate solution for the larger capacity and higher accuracy demands of today's industry.

Koike Aronson/Ransome, Inc. • 635 West Main Street • Arcade, New York

P: 585-492-2400

F: 585-457-3517

www.koike.com

6kW Lasertex Z Series
 Trumpf TLF 6000 Turbo HQ
 Mild steel cutting capacity: 1 in.
 Stainless steel cutting capacity: ¾ in.

4kW Lasertex Z Series
 Fanuc Series C4000i-B
 Mild steel cutting capacity: ¾ in.
 Stainless steel cutting capacity: ½ in.




FEATURES

- Sigma Box beam delivery system
- Unmanned Operation
- HSQ piercing includes AFT
- Common-line cutting
- Plate Collision Skip Function
- Superior cut accuracy
- Automatic plate detection
- Carriage Pendant Operation
- Chiller Included
- End of Job Machine Shut-down
- Setting of Cutting Conditions
- Stainless Steel cutting, Marking
- High-pressure nitrogen manifold
- Optimal cutting parameters provided
- Cutting length up to 150 ft

SIGMA BOX

- Stable & a higher quality beam for a longer time period
- Longer period between periodic maintenance
- Longer lifetime of optical components
- Fixed beam path for X & Y motion
- Eliminates constant beam path device & bellow system
- Operator friendly easy maintenance
- Higher safety
- Machine balance is the best.
 (resonator moves with traverse carriage)

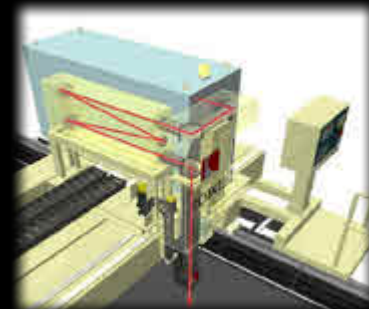

Unlimited length of cut allows to run the machine "unmanned", for scheduled laser cutting operation of multiple plate location and thickness.

Costs are significantly reduced, by operating the system unattended (lights out) during night shift hours, due to decreased cost of power and no operator interaction.

External beam path is fixed on the traverse carriage; guarantees better cut quality for longer period .



HSQ



Quick Piercing



AFT Nozzle

HSQ Piercing (High Speed and High quality) Patent No. 2875626 and others
 The High Speed & Quality (HSQ) system uses a servomotor to move the lens' focal point downward during the pierce cycle while the nozzle is at higher position, and automatically adjusts the nozzle height and focal point after the piercing to have high quality cutting.

AFT nozzle (Active Flow Technology) Patent pending

The AFT (Active Flow Technology) nozzle makes thick plate piercing and cutting stable, by controlling the heat to the plate.

These features allow the Lasertex to run with improved cut quality, quicker pierce times, improved unmanned operation results, and significantly increased life span of the nozzle and lens.



Fanuc 4kW Resonator

- Oil mist resolution element
- Contamination collecting device
- Nano-precise mirror holding unit
- RF discharge style excitation



Trumpf 6kW Resonator

- Symmetrical and compact structure of the resonator.
- Oil-free magnetic bearing turbo blower.
- RF discharge style excitation.
- Separated cooling circuit for aluminum and copper lines.



Optional Equipment

- * **BEVEL CUTTING HEAD**
 - Fully contouring laser bevel cutting unit (6kW).
 - V (positive, negative, and CBVA), and Y bevel available.
 - Proven technology in heavy industry application.
 - Torch collision detection prevents breakage of equipment.
- * **DOWN DRAFT TABLE and OPEN FRAME TABLE**
- * **HEAD / TAIL STOCK for PLATE & TUBE CUTTING**

